



Document Solutions

> PRINT > COPY > SCAN > FAX

TASKalfa 1800

TASKalfa 2200

MONOCHROME  
MULTIFUNCTION PRODUCT  
FOR A4/A3 FORMAT



**COMPACT AND TOUGH**  
**A MARK OF**  
**TOP RELIABILITY**




- Copy, Print, Color Scan as standard
- Fast first copy/print time in just 5.7 seconds.
- Password enabled Print Box function for secure print and prevention of mixture of outputs.
- Standard 256MB memory.
- Standard 300 sheets paper cassette and 100 sheets multi-purpose tray with maximum paper capacity up to 1,300 sheets.
- Environmentally friendly design with up to 150,000 pages long life drum unit and duplex printing capable\*.

\*Optional Duplex Unit DU-480 required.

		Main Specifications	
Model		TASKalfa 1800	TASKalfa 2200
Main Function		Copy, Print, Scan, Fax	
Writing Method		Semiconductor Laser	
CPU		500MHz	
Print Speed (A4) Simplex/Duplex (Optional)		18/11 cpm	22/11 cpm
Memory		256MB	
Warm Up Time		17.2 seconds	
Paper Capacity	Standard	400 sheets: 1 x 300 sheets (Cassette) + 100 sheets (MPT)	
	Maximum	1,300 sheets (Main Unit + PF-480 x 3 + MPT)	
Paper Size	Cassette	Min. A5R - Max. A3 (Ledger)	
	MPT	Min. A6R - Max. A3 (Ledger)	
Paper Weight	Cassette	64 to 105 g/m <sup>2</sup>	
	MPT	45 to 160 g/m <sup>2</sup>	
Duplex Printing (Optional)		Paper size: A5R to A3; Paper weight: 64 to 105 g/m <sup>2</sup>	
Display LCD (Back Light)		2-line, 128 x 32 dot	
Dimension (W x D x H) (Main Unit)		565 mm x 527 mm x 485 mm (with platen)	
Weight (Main Unit)		27kg (with platen)	
Power Consumption (Standard configuration) (220 to 240V)	Copy/Print Mode	385W or less	415W or less
	Stand-by Mode	75W or less	76W or less
	Energy Saver	1.54W or less	
Noise (ISO7779/ ISO9296)	Copy/Print Mode	62dB(A)	
	Stand-by Mode	40dB(A)	
<b>Copy Functions (Standard)</b>			
Copy Size		Max. A3 (Ledger) - Min. A6R	
Resolution		600 x 600 dpi	
First Copy Time		5.7 seconds	
Zoom Ratio	Manual	25% to 400% (1% per Step)	
	Pre-defined	5R5E	
Multiple Copy		1 to 999	
ID Card Copy		Yes	
N-Up Copy		2-in-1, 4-in-1	
<b>Print Functions (Standard)</b>			
Resolution		Fast 1200	
PDL		Host Based (GDI)	
Connectivity		Plug & Play (USB), SNMP	
Operating System Supported		Windows Server 2003, Windows Server 2008, Windows Server 2008 R2, Windows Server 2012, Windows XP, Windows Vista, Windows 7, Windows 8; Apple Macintosh OS 10.5 or more, Linux OS	
Interface		USB2.0 High Speed x1	
Print Box		10	
<b>Scan Functions (Standard)</b>			
Color Selection		Full Color; Grayscale; Mono	
Resolution		Color: 300dpi, 200dpi; Mono: 600dpi, 400dpi, 300dpi, 200dpi	
File Format		TIFF (MMR/JPEG compression), PDF (MMR/JPEG compression/High Compression PDF), JPEG, BMP	
Image Type Mode		Text, Photo, Text + Photo	
Transmission Type		Scan to PC (SMB); Scan to E-mail; TWAIN Scan; WIA Scan, Scan Utility: Client Tool	
Address Storage		10 addresses	
<b>Consumables &amp; Options</b>			
Toner Kit		TK-4109	
Maintenance Kit		MK-4105	
Platen Cover		Platen Cover Type H	
Document Processor		DP-480: 50 sheets RADF	
Paper Feeder		PF-480: 300 sheets x 1 Paper Feeder (A4/Letter)	
Duplex Unit		DU-480	



Basic Machine

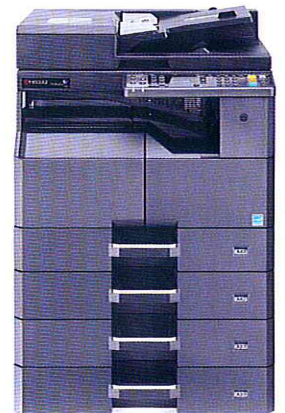

Full Option (DP-480, DU-480, PF-480x2)